


Space Particle Monitor (SPM) for Satellite

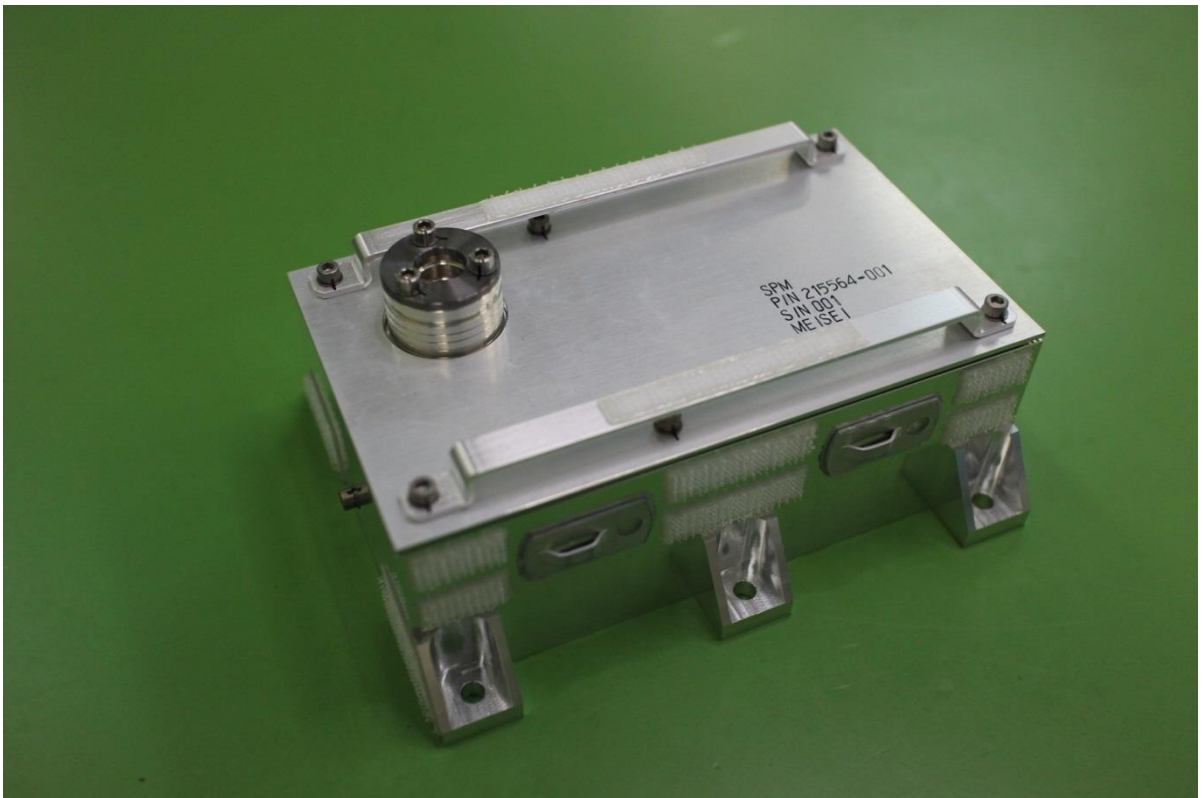

Outline

SPM can count space radiation, and it is used for a small satellite with an altitude of 400 to 500 km.

Features

- Simultaneous classification and energy measurement of electrons, protons, and heavy particles.
- ITAR free
- RoHS nonconformity
- Made in JAPAN

SPECIFICATIONS

Items	Performance
Power supply voltage	+12 V _{DC} (45mA _{typ}), -12 V _{DC} (20mA _{typ}), +5V _{DC} (60mA _{typ})
Telemetry / command interface	RS-422
Line type / Energy range	Electron : >0.21 MeV (2CH)
	Proton : 5.5 to 300 MeV (6CH)
	Heavy Ion : >7.12 MeV/n (2CH)
FOV	±41.2 deg
Dimensions	90 x 132 x 46 mm (flange and screw not included)
Mass	< 900 g
Operating temperature range	-10 to +50 °C
Power consumption	< 1 W
Data rate	256 bps (in the case of 1 sec integration time)
Lead time	About 9 to 12 months after receiving orders. Delivery time depends on availability of calibration test equipment.
Flight heritage	Planning to launch with 'Kakushin satellite(JAXA)' during 2018.

- * Above-mentioned specification is an example.
- * FOV is determined by satellite orbit.
The specifications will be customized to suit your request.
In the case we would kindly ask you to pay for the option fee.

Caution

- For safe and correct usage, please read the "Operation Manual" prior to the use of the products.
- Specifications and designs are subject to change without notice.
- Specifications and designs are based on the standard model. Please contact us regarding further customization to suit your project's needs.
- This product may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in Japan. Customer agrees to comply with such regulations and acknowledges that it is their responsibility to obtain any required licenses to export, re-export, or import this product.
- We shall not be liable for any damages arising out of or in connection with the use of specifications herein, including liability for lost profit, business interruption, or any other damages whatsoever.
- The color of the product photography on catalog might be different from that of actual product because of printing.

www.meisei.co.jp/english

E-mail: aerospace@meisei.co.jp

Headquarters:

2223 Naganumamachi, Isesaki-shi,
Gunma 372-8585, Japan
Tel: +81-270-32-1113 Fax: +81-270-32-0988
Aerospace & Defence Systems Div.

Tokyo Branch:

TOYOSU IHI BUILDING 10F, 1-1, Toyosu 3-chome,
Koto-ku, Tokyo 135-8115, Japan
Tel: +81-3-6204-8252 Fax: +81-3-6204-8888
Sales & Marketing Dept.
Aerospace & Defence Systems Div.

meisei electric co.,ltd.